




High Capacity. Durable.

Commercial Grade Water Dispenser Solutions

Extra C-Tap

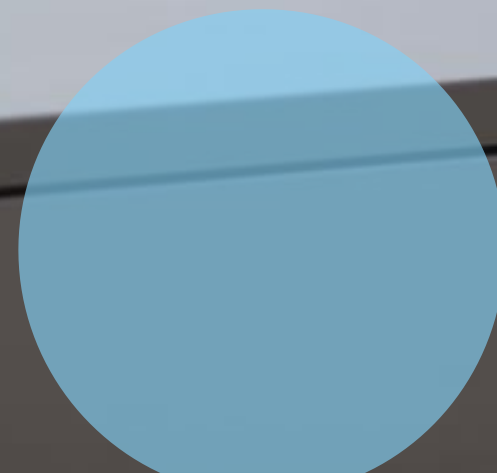



# Commercial Grade Water Dispenser Solutions



## Built to last

Created with a high degree of craftsmanship. Dependable, tested for lasting performance. C-Tap brushed stainless-steel designer tap with glass touch pane. Designed to be repaired or refurbished.

## Customer Delight

Versatile design, easy touch activation. Customisable with 5 water types. Perfect flow. Easy Access Panel. Pre-programmable portion control and water temperature

## Proven performance

Total solution, High capacity for 600 cups per minute with eco-friendly refrigerant R290. BRITA filtration technology. Controlled flow and instant hot draw off. Suitable to fill bottles.

## World-Class Customised Service

Service agreements, dedicated support, expert technicians, customised installation, water monitoring, and testing. Nationwide availability (AU/NZ) with white glove care. Tailored setup for personalised taste profiles.



## Introducing Extra C-Tap

Our signature hot-and-cold water dispenser:  
outstanding design and state-of-the-art technology.

- Smart and stylish: brushed stainless-steel designer tap with glass touch panel above the counter; filter, carbonator, cooler and boiler out of sight below
- Choice of up to five water types: unchilled and chilled still, chilled semi-sparkling and sparkling – plus hot water on demand e.g., for tea and coffee.
- Low energy consumption, with boiler standby/ night modes
- Proven BRITA filtration technology ensures excellent-tasting cold and hot water and prevents limescale. No descaling process needed
- Optional Easy Access Panel available



# Extra C-Tap

Our signature hot-and-cold water dispenser:  
outstanding design and state-of-the-art technology.



Anti-scalding feature  
for hot water

BRITA filtration pre- serves  
minerals in water while  
removing unwanted  
substances



The Easy Access Panel helps cre- ate a  
barrier-free, inclusive work- ing  
environment. The optional control unit  
can be positioned to provide easy  
access for wheel- chair users

Intuitive glass touch pad  
plus optional Easy Access Panel

ThermalGate™  
powerful thermal-  
disinfection feature



Drip tray  
with direct connection to  
wastewater system




 BRITA















Watch our Video on Y

# Extra C-Tap



## Technical data



Model	Extra C-Tap still cold + ambient	Extra C-Tap still cold + ambient + sparkling	Extra C-Tap still cold + ambient + hot	Extra C-Tap still cold + ambient + sparkling + hot
Design / Type	Tap System: C-Tap			
Types of water	 	   	  	    
<b>Configuration options</b>				
Tap height	tall tap (330 mm dispensing height)			
For installation in barrier-free environments	Easy Access Panel			
For installation without waste water connection	waste water container			
<b>Specifications</b>				
Cooling capacity	85 l/h			
Heating capacity	–	–	boiler: 20 l/h	
Fits into undercounter cabinet with the following dimensions (W x H x D)	600 x 800 x 600 mm		800 x 800 x 600 mm	
Dimensions of undercounter appliances (W x H x D)	cooler: 272 x 490 x 473 mm		cooler: 272 x 490 x 473 mm boiler: 230 x 415 x 234 mm	
Dimensions of tap incl. drip tray (W x H x D)	short tap: 134 x 339 x 269 mm tall tap: 134 x 409 x 269 mm			
Weight	tap: 1.9 kg undercounter appliance (cooler): 38.5 kg		undercounter appliance: cooler 38.5 kg undercounter appliance: boiler 7.8 kg	
Max. power consumption, cooler	540 W			
Max. power consumption, boiler	–	–	2.1 KW	
Max. flow rate, still water	2 l/min (600 cups)			
Max. flow rate, sparkling water	–	1.6 l/min	–	1.6 l/min
Max. flow rate, hot water	–	–	boiler 1.6 l/min	
Max. instant draw-off, hot water	–	–	boiler 1.8 l at up to 95°C	



# BRITA ThermalGate™

Hygiene feature: The powerful thermal disinfection solution from BRITA.

The tap of a typical water dispenser is exposed. A sneeze or touch of a hand can introduce germs. Without a robust safeguard, microorganisms on the wet tap can go on to contaminate the dispenser. That's why our BRITA water dispensers include our ThermalGate™ feature. This regularly heats the tap to protect against contamination automatically. You can sit back and relax – knowing your water dispenser has a proactive, powerful defence against germs, tested by an independent laboratory (Ruhr District Institute of Hygiene).



\*\*applies to BRITA Top Pro





# BRITA

## ThermalGate™

Hygiene feature: The powerful thermal disinfection solution from BRITA.

The tap is automatically heated to over 125°C at regular intervals for thermal disinfection.

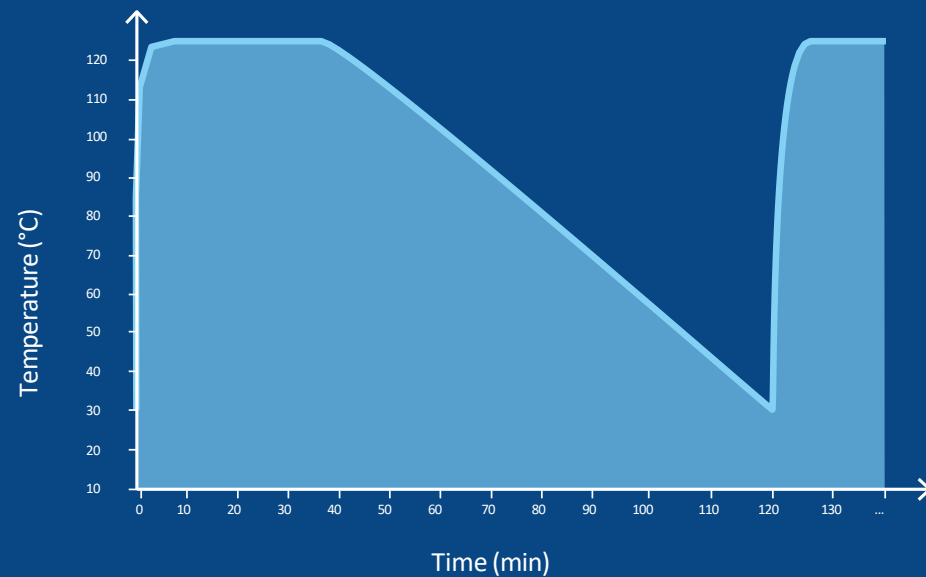


ThermalGate™  
Protects against retrograde contamination.

ThermalGate™ is continuously active, providing protection not only at peak times, but also during periods of inactivity e.g., at night or on weekends

Does not require manual effort or chemical additives

Developed through over 20 years' experience in the healthcare market



## Introducing Easy Access Panel

Additional BRITA dispenser control unit for a barrier-free environment.

- Control unit can be positioned to provide easy access for wheelchair users
- Helps create a barrier-free, inclusive working environment
- Installs angled or flat for mounting on the counter or cabinet
- Available for different configurations of Top Pro, Extra I-Tap and Extra C-Tap





# Easy Access Panel

Additional BRITA dispenser control unit for a barrier-free environment.



Design and operation tailored to BRITA water dispensers



Barrier-free environment




Choice of water types in line with the installed BRITA water dispenser

Convenient positioning Can be installed at various heights

Watch our Video on YouTube

Three installation options:

- Angled
- Flat: on countertop
- Flat: on cabinet front



# We know Water

Outstanding water filtration, created by BRITA. For over 50 years, BRITA has stood at the forefront of water filtration technologies. A globally recognized brand and trusted industry leader.




## Dependable hygiene

With 20+ years in the healthcare sector. Industry Benchmark HygienePlus solution with ThermalGate™



## Precision German Engineering

Filters developed and manufactured in Germany, dispensers assembled in Italy.

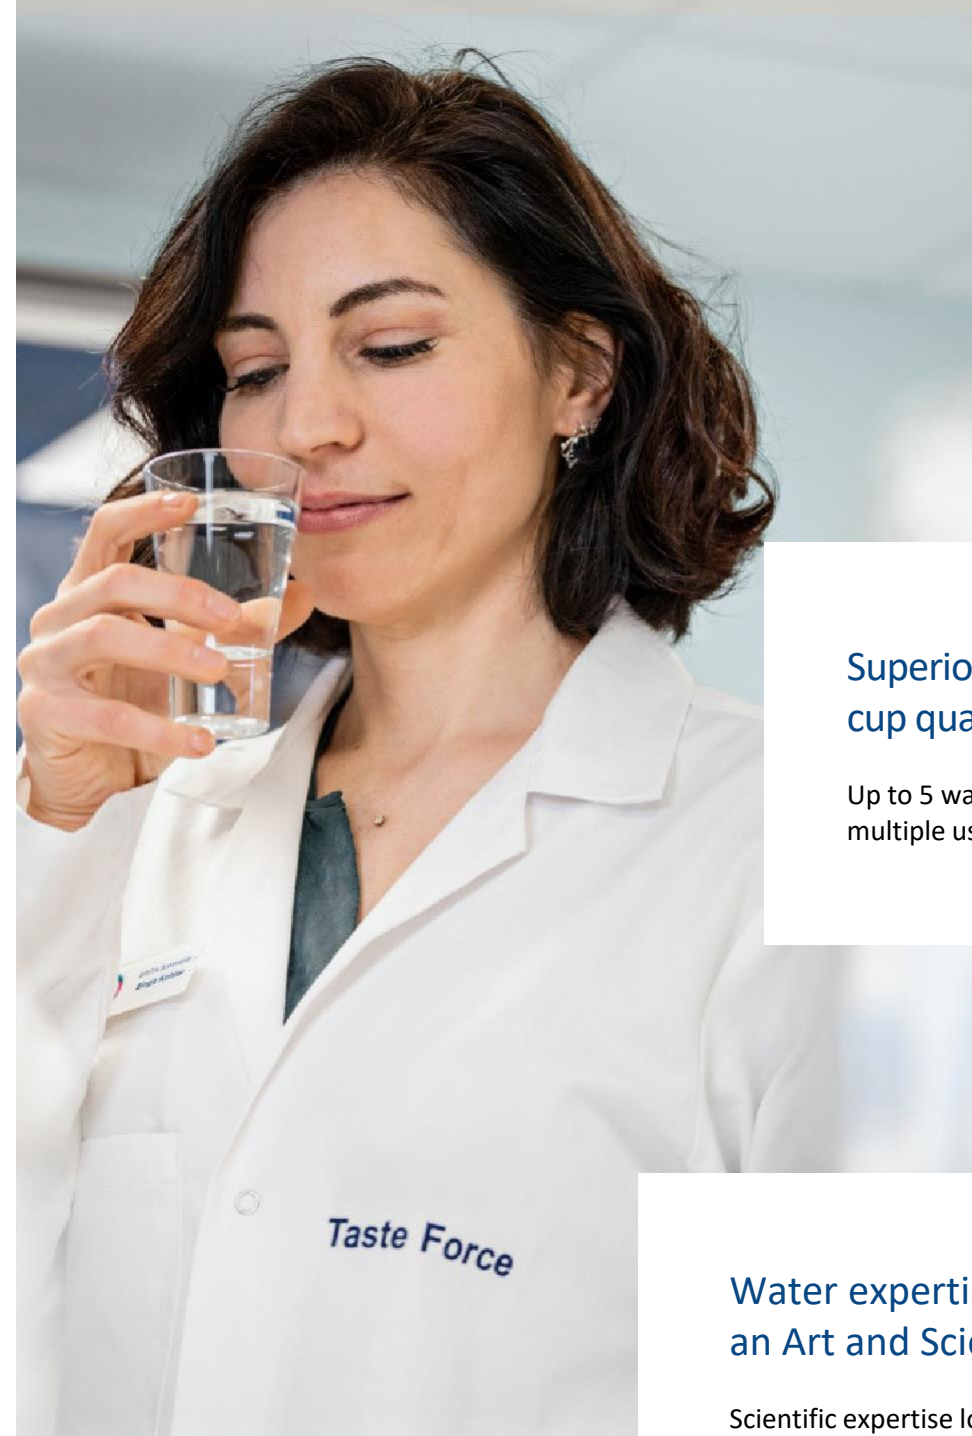

## Superior Taste and in cup quality

Up to 5 water types and multiple usage occasions.

## Water expertise: an Art and Science

Scientific expertise local knowhow, water mapping and customisation to AU/NZ market.

# Benefits of BRITA filtration technology



When dispensing cold still or sparkling water:

- refreshing water with improved taste, every time
- reduced cloudiness for crystal-clear drinking water
- reliable dispenser operation, outstanding safety and hygiene

When dispensing hot water:

- development of full, rich aroma and flavour for hot beverages
- protection against limescale build-up to maximise your machine's lifetime and performance

The CLARITY Protect clean **1** water dispenser filter ensures exceptionally water

Mains water is strictly monitored, but some bacteria, metals, microplastics and organic impurities could remain or be introduced, via piping for example. CLARITY Protect keeps these unwanted germs and particles out of your drinking water, and also reliably reduces treatment residues, such as chlorine, that affect its taste and smell.

Hot water filtration with PURITY C Dispenser **2** filter

The PURITY C Dispenser filter protects the dispenser by reducing water hardness, tackling the common problem of limescale. It also removes unwanted, taste-impairing substances. And with its bypass settings, you can control the degree of hardness – just the right amount, for instance, to prepare a perfect cup of your hot beverage.





## CLARITY Taste

Water filter: Crystal clear water for cold drinks.

Reduces:

- particles such as microplastics or sand
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres



# CLARITY Taste

Water filter: Crystal clear water for cold drinks.

Sometimes, “standard” can be outstanding. CLARITY Protect delivers an extra level of safety through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “gold standard” filter.

CLARITY Taste reduces:

Fine particles such as microplastics or sand

Metals such as lead

Pharmaceuticals, pesticides and hormones

Chlorine taste and odour

Organic impurities

Asbestos fibres



The right balance  
Retains minerals in water

Activated carbon filtration  
Reduces substances that impair taste and odour

Pre-filter  
Removes particles



Filter capacity:  
Taste 50: 4,000 l  
Taste 100: 11,500 l

Perfect-tasting water with ideal properties

Protects equipment lowering dispenser maintenance costs



# CLARITY Taste



## Technical data



Model	Taste 50	Taste 100	Taste 50R (retrofit)	Taste 100R (retrofit)
Technology	activated carbon			
Water intake temperature	4°C to 30°C			
Ambient temperature for operation	4°C to 40°C			
Ambient temperature for storage / transport	-20°C to 50°C			
Water inlet and outlet connection	CLARITY filter head JG 8 mm		Everpure filter head	
Operating pressure	2 bar to 8.6 bar			
Flow rate at 1 bar pressure loss	180 l/h			600 l/h
Operating flow range and associated pressure loss	40 l/h to 220 l/h   0.2 bar to 1.5 bar	40 l/h to 220 l/h   0.2 bar to 1.3 bar	40 l/h to 220 l/h   0.2 bar to 1.5 bar	40 l/h to 350 l/h   0.1 bis 0.4 bar
Nominal filter capacity	4,000 l	11,500 l	4,000 l	11,500 l
Operating position	horizontal or vertical			
<b>Efficacy</b>				
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)			≥ 2.0 µm (DIN EN 13443)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)			pending
Reduction of metals such as lead	> 90% (DIN EN 14898)			
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)			
Reduction of organic impurities such as benzene	> 90%			
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	>90% up to at least 4,000 l (CLARITY Taste 50/50R) and 8,000 l (CLARITY Taste 100/100R)			
<b>Dimensions (W x D x H)</b>				
Filter system (filter head with filter cartridge)	68 x 68 x 251 mm	68 x 68 x 338 mm	-	-
Filter cartridge	68 x 68 x 224 mm	68 x 68 x 311 mm	86 x 86 x 226 mm	86 x 88,6 x 317 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 284 mm	68 x 74 x 371 mm	-	-



## CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:


- particles such as microplastics and sand
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts



# CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

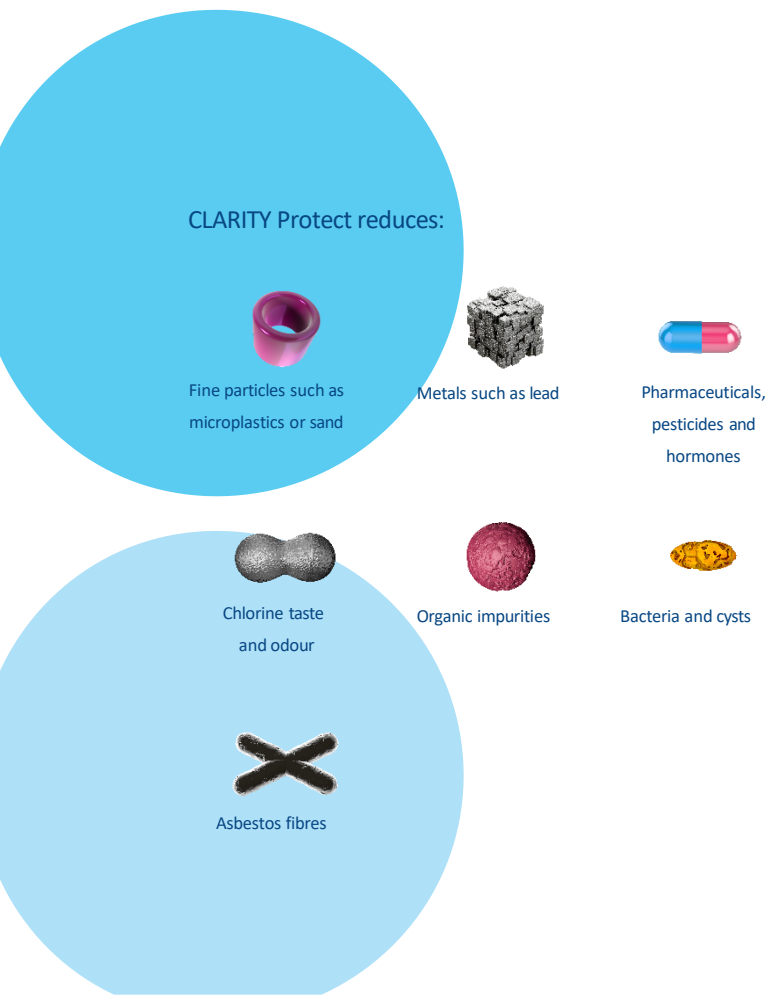

The right balance  
Removes minerals in water

Activated carbon filtration  
Reduces substances that impair taste and odour

Pre-filter  
Removes particles



Hollow fibre membrane  
Filters out 99.999% of bacteria and 99.95% of cysts

Filter capacity:  
Protect: 11,500 l

Exceptionally clean, safe water

Protects equipment  
lowering dispenser maintenance costs



# CLARITY Protect



## Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-05)
Reduction of cysts	99.95%(NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm





 BRITA

## PURITY C Dispenser

Water filter: Excellent filtration designed for hot water dispensers.

Reduces:

- fine particles such as sand
- metals such as lead
- carbonate hardness
- chlorine taste and odour
- organic impurities

KTW  
tested\*

ACS  
conform



\*applies to all materials that come into contact with water

# PURITY C Dispenser



Water filter: Excellent filtration designed for hot water dispensers.

Need piping-hot water? That's no problem for the PURITY C Dispenser cartridge, designed with hot water in mind. It protects the dispenser by reducing water hardness, tackling the common problem of limescale build-up head on. It also removes unwanted, taste-impairing substances. And with its IntelliBypass® feature, you can control the degree of hardness – just the right amount, for instance, to prepare a perfect cup of tea.

PURITY C Dispenser reduces:



Fine particles such as sand



Metals such as lead



Carbonate hardness



Chlorine taste and odour



Organic impurities

Post-filter  
An extra layer of filtration for perfect results

Activated carbon filtration  
Reduces substances that impair taste and odour

Ion exchanger  
Reduces limescale and metals e.g. lead

Pre-filter  
Removes particles.



IntelliBypass® for achieving the ideal mineral composition

Filter capacity: PURITY C300: 2,784 l | PURITY C500: 5,008 l | PURITY C1100: 8,480 l

Adjustable water hardness For great-tasting and perfect hot drinks

Protects equipment lowering dispenser maintenance costs



# PURITY C Dispenser



## Technical data



Model	BRITA PURITY C Dispenser C300	BRITA PURITY C Dispenser C500	BRITA PURITY C Dispenser C1100
Technology	decarbonisation		
Capacity <sup>1</sup> at a carbonate hardness of 10°dH / bypass setting of 40%	2,784 l	5,008 l	8,480 l
Max. operating pressure	2 bar to max. 8.6 bar		
Water intake temperature	4 – 30 °C		
Nominal flow	60 l/h	100 l/h	
Pressure loss at nominal flow	0.25 bar	0.5 bar	
Dimensions (W x H x D) of filter head with filter cartridge	125 x 119 x 466 mm	144 x 144 x 557 mm	184 x 184 x 557 mm
Weight (dry / wet)	2.8 / 4.2 kg	4.6 / 6.9 kg	7.7 / 12.5 kg
Connections (input / output)	G 3/8" or John Guest 8 mm		
Operating position	horizontal and vertical		


<sup>1</sup> The capacities given have been tested and calculated on the basis of normal application and machine conditions. Due to external influences (e.g. variations in raw water quality and/or machine type), deviations from these results can occur.



# The Total Solutions Provider



Your trusted water solutions partner.  
Quality, sustainability-focused, cost-efficiency.  
End-to-end support for your drinking water needs

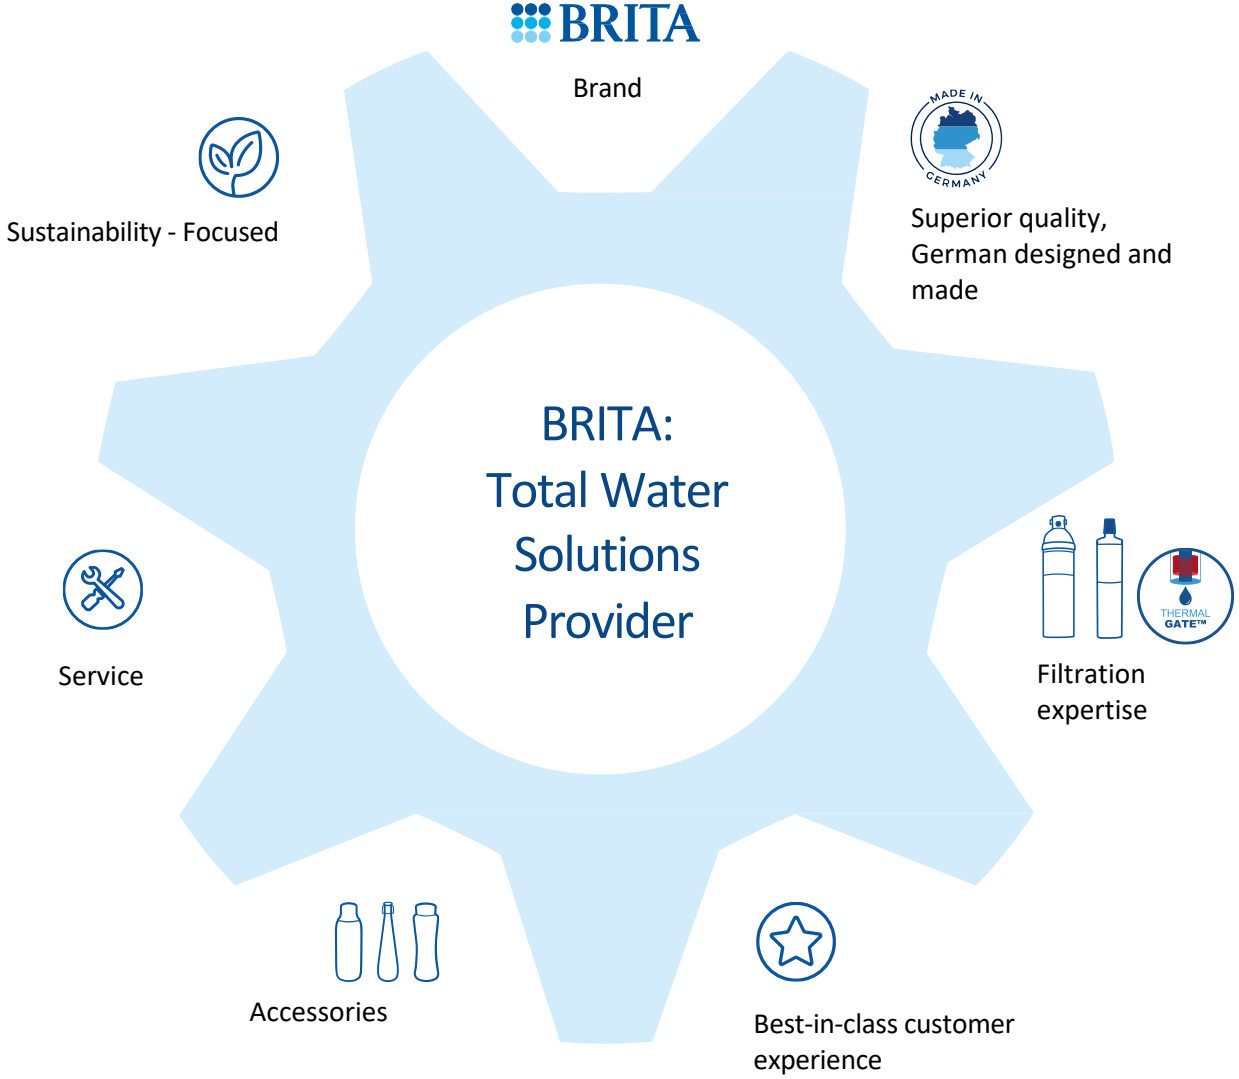

For full range options on machinery, accessories and how to become a BRITA distributor contact:  
Tel: 1300 955 021 (Australia) | Tel: 0800 482 008 (New Zealand) | [professional@brita.com.au](mailto:professional@brita.com.au) | [www.brita.com.au](http://www.brita.com.au)